
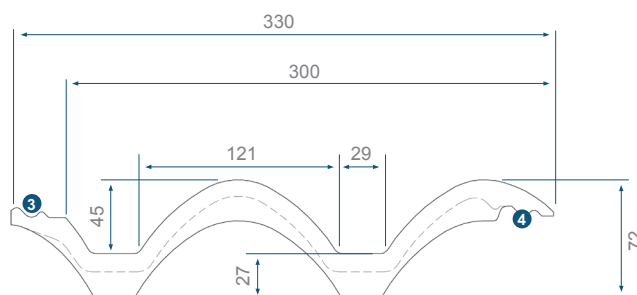


Sunrise 4.4™ concrete deep roll tile

Features

- ❶ Weather barrier against wind-driven rain (triple weatherbars)
- ❷ Clip housing
- ❸ Tile interlock to ensure protection under adverse conditions
- ❹ Raised interlock to fit position 3
- ❺ Strengthening transversal ribs
- ❻ Batten lugs
- ❼ Nail holes
- ❽ Batten bearers

Technical Specifications	
Tile size (overall)	420 x 330 mm
Effective width	300 mm
Nominal tile mass	4.4 kg (approx.)
Overlapping	70 - 100 mm
Batten centre	320 mm
Tiles per m ²	10.42 tiles/m ²
Weight per m ²	46 kg
Roof pitch minimum	17° - 25°
Undertile membrane/ Eco Shield™ mandatory	

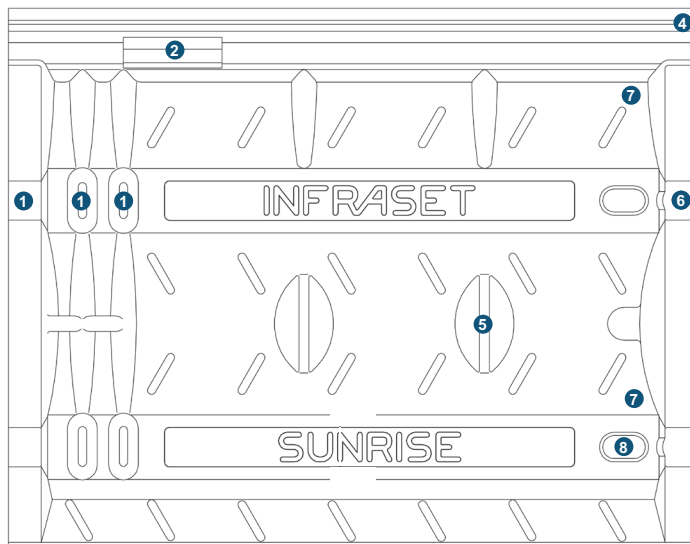

Special note:

The roof structure specifications should comply with building regulations in your area.
No allowance made for wastage.

Available in the following colour options:

Brown Standard SR BR STD 4.4	Amber Standard SR AM STD 4.4	Red Standard SR RE STD 4.4	Slate Standard SR SL STD 4.4	Terracotta Standard SR TC STD 4.4	Dolomite Standard* SR DO STD 4.4
Brown Vintage SR BR VT 4.4	Amber Vintage SR AM VT 4.4	Red Vintage SR RE VT 4.4	Slate Vintage SR SL VT 4.4	Terracotta Vintage SR TC VT 4.4	Dolomite Vintage* SR DO VT 4.4

* Available on request. Subject to lead time and minimum order quantity.