

Horizon™ concrete shingle tile

Features


- ❶ Weather barrier against wind-driven rain (triple weather bars)
- ❷ Clip housing
- ❸ Tile interlock to ensure protection under adverse conditions
- ❹ Precision interlock to fit position 3
- ❺ Strengthening tile support
- ❻ Batten lugs
- ❼ Batten bearers
- ❽ Nail hole

Special note:


No half tiles required.

Straight bond tiling.

Undertile membrane / Eco Shield™ mandatory

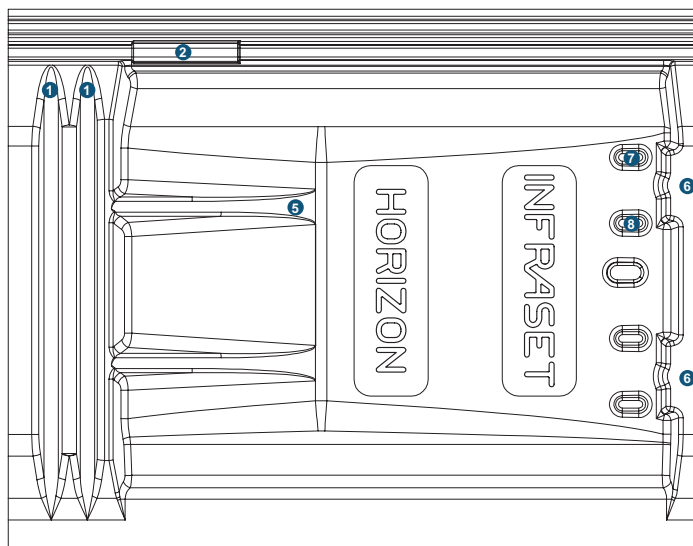

Technical Specifications	
Tile size (overall)	420 x 330 mm
Effective width	300 mm
Nominal tile mass	5 kg
Overlapping	min. 100 mm
Battens centre	320 mm
Tiles per m ²	10.42 tiles
Weight per m ²	53 kg
Roof pitch minimum	17°
Undertile membrane/ Eco Shield™ mandatory	

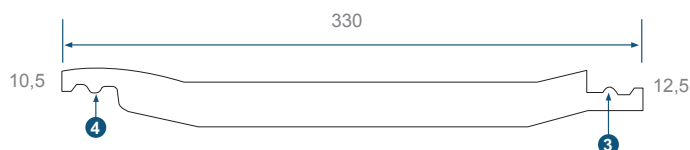

Special note:

The roof structure specifications should comply with building regulations in your area.

No allowance made for wastage.

Available in the following colour options:

Brown Standard HZ BR STD	Amber Standard HZ AM STD	Red Standard HZ RE STD	Slate Standard HZ SL STD	Terracotta Standard HZ TC STD	Dolomite Vintage* HZ DO STD
Brown Vintage HZ BR VT	Amber Vintage HZ AM VT	Red Vintage HZ RE VT	Slate Vintage HZ SL VT	Terracotta Vintage HZ TC VT	Dolomite Vintage* HZ DO VT

* Available on request. Subject to lead time and minimum order quantity.